

# nifty



niftylift.com

## 210SD

**SELF DRIVE  
ACCESS PLATFORM**



**21.20m (69ft 7in)**

Working height

**13.20m (43ft 4in)**

Working outreach

**4 Wheel Drive Available**

Maximising traction  
over rough terrain

**4 Wheel Steer Available**

Superior manoeuvrability on site

**Independent Suspension  
Available**

For fast comfortable  
positioning on site

**Platform Rotation  
& Flyboom**

Improved access to applications

**Turf Tyres Available**

Minimise disruption to  
sensitive grass surfaces






# nifty 210SD

The Nifty 210SD is the ultimate combination of our trailer mounted and self propelled product ranges. With full independent suspension and the option of 4 wheel drive, the 210SD can cope with a wide range of working environments and still offers the same impressive reach as the Height Rider 21. Low weight design makes it economical and quick to transport and the 4 wheel steer option gives the operator enormous flexibility to manoeuvre once on site. Excellent gradeability coupled with a good travel speed allow the 210SD to be positioned and set up quickly, allowing the operator to spend more of their time working.

## SAFETY FEATURES

- Pressure sensitive outriggers
- Audible & visual alarms
- Dual controls (platform & base)
- Manual descent with hand-pump
- Lock valves on all hydraulic cylinders
- CE Mark

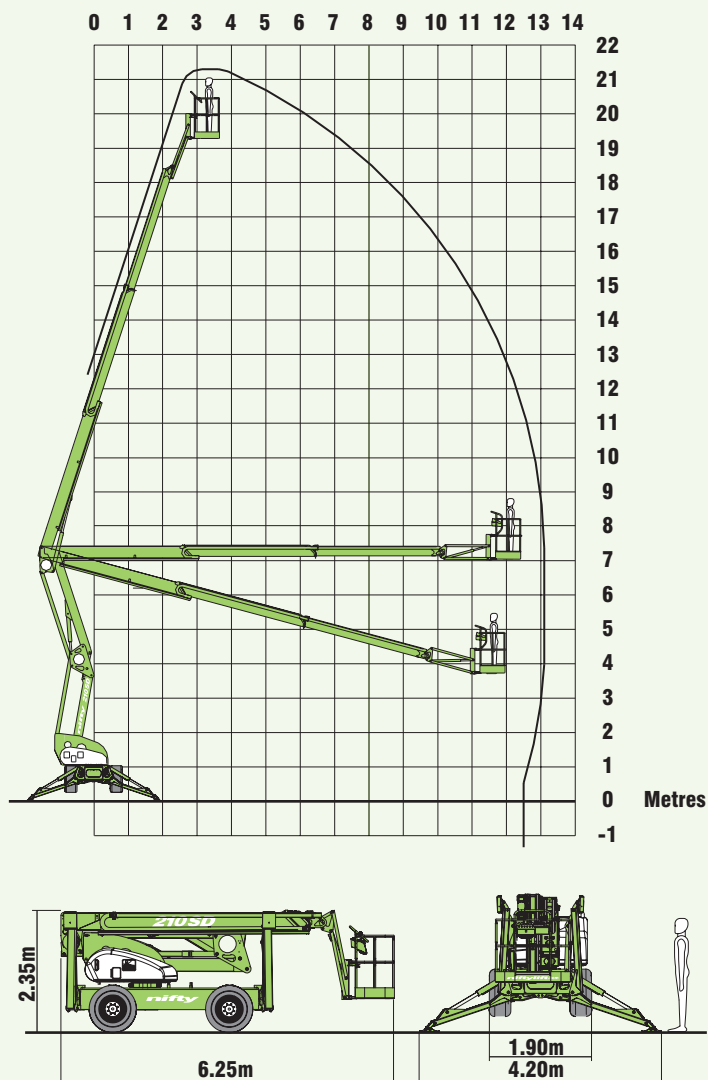

Full Lock Steer

Crab Steer

The extra manoeuvrability available from the 4 wheel steer option coupled with the special "Turf Tyres" make the 210SD ideal for working on sensitive surfaces such as grass.

## SPECIFICATIONS

<b>Working Height</b>	21.20m	69ft 7in
<b>Platform Height</b>	19.20m	63ft
<b>Working Outreach</b>	13.20m	43ft 4in
<b>Slew</b>	360°	
<b>Flyboom Arc</b>	150°	
<b>Width - Travelling</b>	1.90m	6ft 3in
<b>- Working</b>	4.20m	13ft 9in
<b>Height - Stowed</b>	2.35m	7ft 8in
<b>Length - Overall</b>	6.25m	20ft 6in
<b>Weight</b>	3,750kg - 4,250kg*	8,250lbs - 9,350lbs*
<b>Turning Radius - Inside</b>	1.50m	7ft 5in
<b>- Outside</b>	3.50m	17ft
<b>Platform Rotation</b>	100°	
<b>Platform Capacity</b>	225kg	500lbs
<b>Platform Size</b>	1.34m x 0.67m	3ft 8in x 2ft 1in
<b>Drive Speed</b>	10kph	6.3mph
<b>Gradeability</b>	35%	
<b>Control System</b>	Fully proportional hydraulic	
<b>Power System</b>	Kubota 722 - 2WD Kubota 1505 32Hp - 4WD	

\* Weights may vary according to specification, please confirm before ordering.

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.

Supplied by:

Manufacturers of trailer mounted, self propelled and vehicle mounted platforms.



**NIFTYLIFT LTD**  
Fingle Drive  
Stonebridge  
Milton Keynes  
MK13 0ER  
England  
www.niftylift.com

e-mail: info@niftylift.com  
Tel.: +44 (0)1908 223456  
Fax.: +44 (0)1908 312733