



Model: DK3

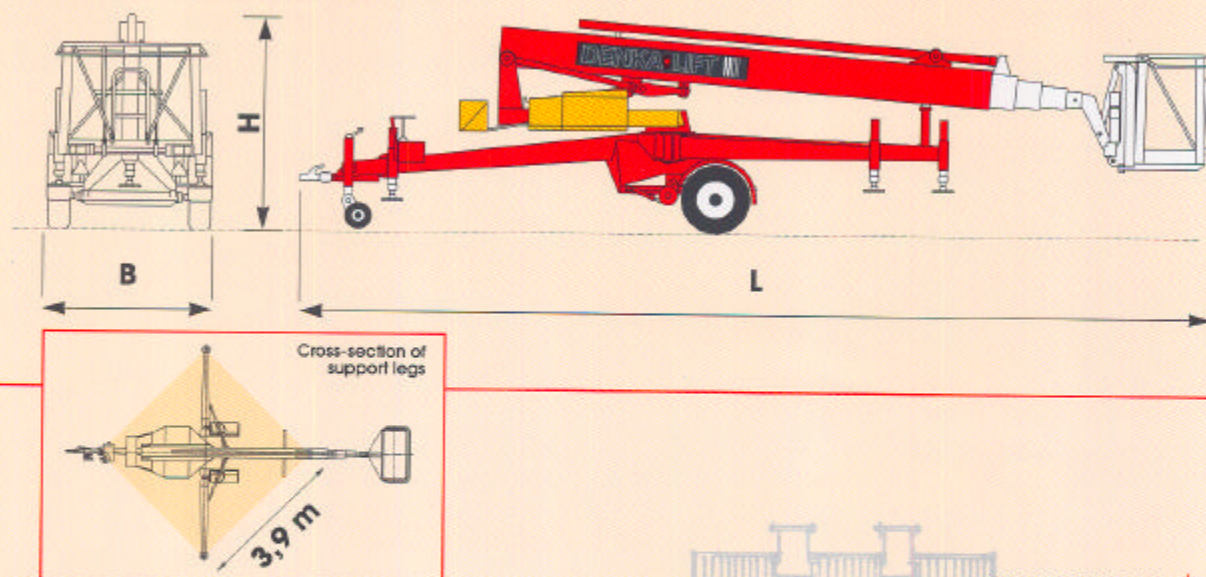

Technical data:

Standard model	DK3 MK23	DK3 MK24	DK3 MK4	DK3 MK9	DK3 MK25
Capacity:					
Max. work. height A	19.5 m	21.0 m	23.5 m	25.0 m	25.0 m
Working height B	16.2 m	18.3 m	21.2 m	22.8 m	23.1 m
Working height C	14.1 m	16.5 m	19.8 m	21.2 m	21.8 m
Max. reach D	11.5 m	11.2 m	11.3 m	11.4 m	11.4 m
Reach E	9.0 m	8.7 m	8.8 m	8.9 m	8.9 m
Max. load in basket	200 kg	200 kg	200 kg	200 kg	200 kg
Max. no. of persons	2	2	2	2	2
Slew movement	cont. 360°	cont. 360°	cont. 360°	cont. 360°	cont. 360°
Transport dimensions:					
Length L	8.35 m	8.75 m	8.2 m	8.35 m	9.0 m
Height H	2.0 m	2.0 m	2.1 m	2.1 m	2.1 m
Width B	1.60 m	1.60 m	1.60 m	1.60 m	1.60 m
Min. length	7.65 m	8.05 m	7.5 m	7.65 m	8.3 m
Net weight	2050 kg	2160 kg	2250 kg	2250 kg	2310 kg
Telescopic boom	4-stags alu	4-stags alu	5-stags alu	6-stags alu	5-stags alu

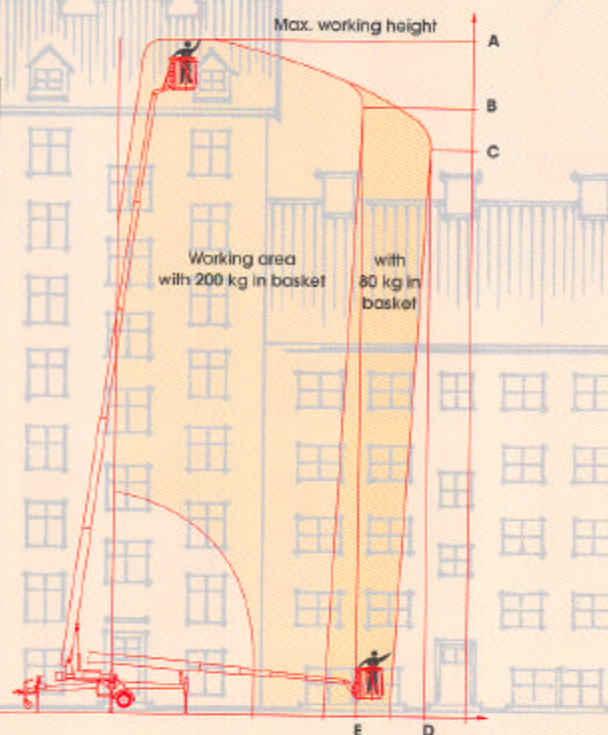

STANDARD EQUIPMENT:

- **Battery operation:**
24 V, operating time approx. 8 hours
- Fully automatic charging system
- Electrical-hydraulic proportional control
- Aluminium basket
(L:700, W:1400, H:1100 mm)
- **Basket suspension:**
MK9: short boom with fixed basket
Other models: angular boom with rotating basket $\pm 45^\circ$

- Automatic basket adjustment
- 220 V current supply in basket
- Manual emergency operation
- Rear lighting board
- Hydraulic support legs

SPECIAL DESIGN:

- The DK3 is also available for 220 V/16 Amp or 380 V direct mains connection
- **Basket suspension:**
Short boom with rotating basket $\pm 45^\circ$ (not MK9)

EXTRA ACCESSORIES:

- Hydraulic drive wheels for movement
- Current supply 100 A/24 V
- Outlets for water/air/steam in the basket
- Yellow rotating flashing light
- Hour counter
- Day counter
- Height-adjustable overrun brake
- Rotating fibreglass basket
(L:700, W:1200, H:1100 mm)

This data represents guidelines only.
We reserve the right to make alterations.