

UpRight
INTERNATIONAL
X26/32

SCISSOR lifts

standard electric

Working height up to:
11.75m (36ft. 7in.)

Manoeuvres easily with
tight inside turning radius

Electronic motor controller
for smooth, quiet operation




Fully proportional
one-hand controls


Steel deck with
slip-resistant surface

Platform material
loading system

Non-marking tyres
protect floors

Five year
structural warranty





specifications	X26	X32
working height (A)	9.93m (32ft.)*	11.75m (36ft. 7ins.)*
platform height (B)	7.93m (26ft.)	9.75m (30ft. 7ins.)
drive height (max)	7.93m (26ft.)	9.75m (30ft. 7ins.)
platform capacity (max)	454kg. (1000lbs.)	340kg. (700lbs.)
platform size - inside with deck extended	1.17m x 3.2m (46.25ins. x 126ins.)	1.17m x 3.2m (46.25ins. x 126ins.)
width (C)	1.22m.(48ins.)	1.22m.(48ins.)
stowed height (D)	2.12m.(83.5ins.)	2.25m.(88.5ins.)
- with guardrails lowered	1.99m (78ins.)	1.88m (74.25ins.)
length (E)	2.35m. (92.5ins.)	2.35m. (92.5ins.)
weight	2,153kg. (4,747lbs.)	2,486kg. (5,480lbs.)
drive speed (max)	3.2km/h. (2.0mph.)	3.2km/h. (2.0mph.)
-with platform raised	1.0km/h. (0.62mph.)	1.0km/h. (0.62mph.)
inside turning radius	203mm. (8ins.)	203mm. (8ins.)
control system	one-hand proportional control	
gradeability	12° (22%)	12° (22%)
lift speed - raised / lowered	45 secs./40 secs.	65 secs./40 secs.
drive system	dual front wheel hydraulic motors	
power source	4 x 6V 220 Ah batteries	
tyres	381mm (15ins.) dia. solid non-marking	
ground clearance	89mm. (3.5ins.)	89mm. (3.5ins.)
toeboards	152mm. (6ins.)	152mm. (6ins.)
battery charger	25 A, 110/220V AC	
parking brake	dual, spring-applied, hydraulic release	

*Metric working height is 2m above platform height. Working height in the U.S. is 6 ft. above platform height.

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate UpRight International Operators manual for detailed instructions on the proper use and maintenance of this equipment.


standard features

- Roll-out deck extension
- One-hand proportional control
- Non-marking tyres
- Swing-out service modules
- Tilt alarm, descent alarm
- Selectable all motion alarm
- Lift up rear guardrail to ease material loading
- Crane and forklift points
- Cushion down scissor descent
- Horn
- Removable controller
- Grease points fitted

- Hour meter/low voltage indicator
- Dual front wheel drive
- 1 year parts/service
- 5 year structural warranty

options

- Air line to platform
- Flashing beacon
- Special paint colours
- Environmental green oil
- Power to platform

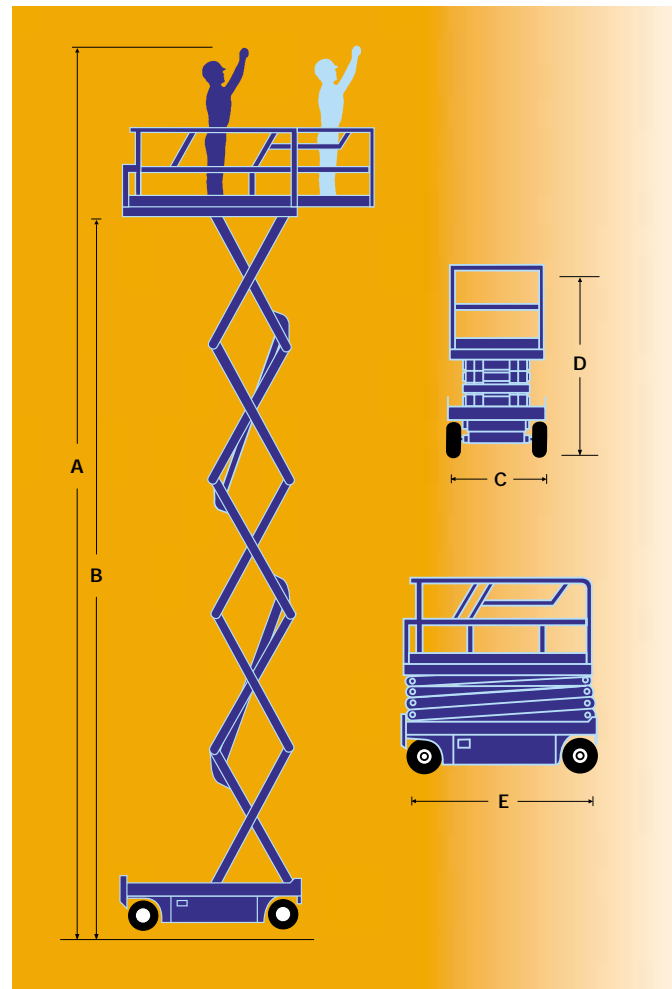

Meets or exceeds applicable requirements of OSHA and ANSI A92.6 - 1999.

CE This product is available with the CE mark confirming compliance with all relevant European Machinery Directives

manufactured by
UpRight
INTERNATIONAL



www.uprighteuro.com
info@uprighteuro.com

IRELAND

Tel + (353) 1 620 9300
Fax + (353) 1 620 9301

UK

Tel + 44 (0) 1952 685200
Fax + 44 (0) 1952 685255

