


Specifications

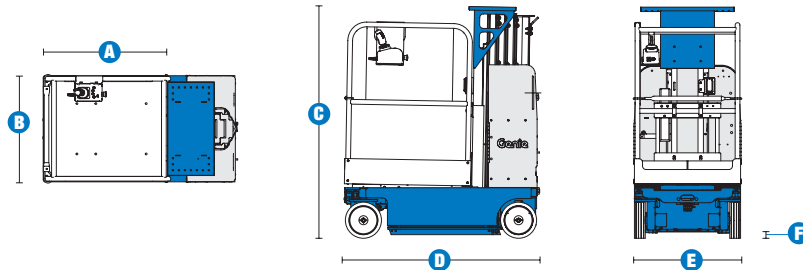

MODELS	GR™-12		GR™-15		GR™-20	
MEASUREMENTS	US	Metric	US	Metric	US	Metric
Working height*	17 ft 5 in	5.48 m	20 ft 8 in	6.47 m	25 ft 11 in	8.07 m
Platform height	11 ft 5 in	3.48 m	14 ft 8 in	4.47 m	19 ft 11 in	6.07 m
A B Platform dimensions (l x w)						
Standard	35 x 29.5 in	.88 x .75 m	35 x 29.5 in	.88 x .75 m	35 x 29.5 in	.88 x .75 m
Standard with extension	55 x 29.5 in	1.4 x .75 m	55 x 29.5 in	1.4 x .75 m	55 x 29.5 in	1.4 x .75 m
Stock picker	35 x 28.75 in	.88 x .73 m	35 x 28.75 in	.88 x .73 m	35 x 28.75 in	.88 x .73 m
Stock picker w/adjustable tray	56 x 28.75 in	1.4 x .73 m	56 x 28.75 in	1.4 x .73 m	56 x 28.75 in	1.4 x .73 m
Standard AWP	27 x 26 in	.69 x .51 m	27 x 26 in	.69 x .51 m	27 x 26 in	.69 x .51 m
Narrow AWP	26 x 20 in	.66 x .51 m	26 x 20 in	.66 x .51 m	26 x 20 in	.66 x .51 m
Standard fiberglass	29 x 26.5 in	.74 x .67 m	29 x 26.5 in	.74 x .67 m	29 x 26.5 in	.74 x .67 m
Narrow fiberglass	26 x 22 in	.66 x .56 m	26 x 22 in	.66 x .56 m	26 x 22 in	.66 x .56 m
C Height - stowed	5 ft 2 in	1.57 m	5 ft 2 in	1.57 m	6 ft 6 in	1.98 m
D Length - stowed	4 ft 5 in	1.35 m	4 ft 5 in	1.35 m	4 ft 5 in	1.35 m
E Width	2 ft 5.5 in	.75 m	2 ft 5.5 in	.75 m	2 ft 7.5 in	.80 m
F Ground clearance - center	2.5 in	.06 m	2.5 in	.06 m	2.5 in	.06 m

PRODUCTIVITY						
Lift capacity	500 lbs	227 kg	500 lbs	227 kg	350 lbs	159 kg
Lift capacity - extension deck	250 lbs	113 kg	250 lbs	113 kg	250 lbs	113 kg
Drive speed - stowed	2.5 mph	4.0 km/h	2.5 mph	4.0 km/h	2.5 mph	4.0 km/h
Drive speed - raised	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h	0.5 mph	0.8 km/h
Gradeability**	30%		30%		30%	
Turning radius	zero		zero		zero	
Controls	24 V DC proportional		24 V DC proportional		24 V DC proportional	
Tires	non-marking		non-marking		non-marking	

POWER						
Power source	24 V (four 6 V 225 Ah batteries)		24 V (four 6 V 225 Ah batteries)		24 V (four 6 V 225 Ah batteries)	
Hydraulic system capacity	2.2 gal	8.33 L	2.2 gal	8.33 L	2.2 gal	8.33 L

WEIGHT***						
	1,581 lbs	717 kg	2,192 lbs	994 kg	2,451 lbs	1,112 kg

STANDARDS COMPLIANCE	ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10
----------------------	---

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.
 ** Gradeability applies to driving on slopes. See operator's manual for details regarding slope rating.
 *** Weight will vary depending on options and/or country standards.

Features

EASILY CONFIGURED TO MEET YOUR NEEDS

PLATFORM OPTIONS

- Standard platform
- Sliding mid-rail extension deck
- Gated extension deck
- Stock Picker platform
- Stock Picker platform with adjustable tray
- Stock Picker platform with rear parcel tray (GR-12 and GR-15 only)
- Standard AWP platform
- Narrow AWP platform
- Standard AWP fiberglass platform
- Narrow AWP fiberglass platform

POWER

- 24 V (four 6 V 225 Ah batteries)

TIRE

- Non-marking solid tires

STANDARD FEATURES

MEASUREMENTS

GR™-12

- 17 ft 5 in (5.48 m) working height
- 11 ft 5 in (3.48 m) platform height
- Up to 500 lb (227 kg) lift capacity

GR™-15

- 20 ft 8 in (6.47 m) working height
- 14 ft 8 in (4.47 m) platform height
- Up to 500 lb (227 kg) lift capacity

GR™-20

- 25 ft 11 in (8.07 m) working height
- 19 ft 11 in (6.07 m) platform height
- Up to 350 lb (159 kg) lift capacity

PRODUCTIVITY

- Patented rigid mast system
- Compact base 29.5 x 53 in (.75 m x 1.35 m)
- Standard sliding midrail platform 29.5 x 35 in (.75 x .88 m)
- Low 15 in (.38 m) platform entry height
- Adjustable work station tray
- Fully proportional lift and drive controls
- Onboard diagnostic system
- AC power to platform
- Descent and tilt alarm
- Auxiliary platform lowering
- Zero inside turning radius
- Dual wheel brakes
- Hydraulic brake release
- Pothole protection
- Hinged rear covers for easy access to all major electrical and hydraulic components
- Large forklift pockets 2.5 x 5.125 in (.06 x .13 m)
- Tie down attachment points
- Non-marking solid tires

POWER

- Automatic 25 amp battery charger



OPTIONS & ACCESSORIES

PRODUCTIVITY

- Sliding mid-rail extension deck
- Gated extension deck
- Stock Picker platform with adjustable tray
- Stock Picker rear parcel tray (GR-12 and -15)
- Stock Picker bike rack
- Standard AWP platform
- Narrow AWP platform
- Standard AWP fiberglass platform
- Narrow AWP fiberglass platform
- Fluorescent tube caddy
- Motion alarm and flashing beacons
- Automotive horn

POWER

- 800 watt inverter (120-230 V AC/50-60 Hz)
- Maintenance-free batteries

Genie United States

18340 NE 76th Street
P.O. Box 97030
Redmond, Washington 98073-9730

Telephone **(425) 881-1800**
Toll Free in USA/Canada **800-536-1800**
Fax (425) 883-3475

Genie Europe

The Maltings
Wharf Road
Grantham NG31 6BH
U.K.

Telephone **+44 (0)1476 584333**
Fax +44 (0)1476 584334

Email: infoeurope@genieind.com

Distributed By:

For further information, please contact your local distributor or the Genie Industries sales office listed. Continuous improvement of our products is a Genie policy. Product specifications are subject to change without notice or obligation. The photographs and drawings in this brochure are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. Prices and specifications subject to change without notice. The only warranty applicable is the standard written warranty applicable to the particular product and sale. Genie makes no other warranty, expressed or implied. Products and services listed may be trademarks, service marks or trade-names of TEREX Corporation and/or its subsidiaries in the USA and other countries and all rights are reserved. Copyright © 2005 Genie Industries, Inc. "Genie" is a Registered Trademark of Genie Industries, Inc. in the USA and many other countries. Genie is a TEREX Company.