

JCPT(DC)

Self-Propelled Scissor Lifts (Electric Motor Drive)



Dingli JCPT0808DC JCPT1008DC JCPT1012DC JCPT1212DC JCPT1412DC JCPT1612DC



| | | | | | | |
|--------------------|-------|-------|-------|-------|-------|-------|
| S.W.L | 380kg | 230kg | 450kg | 320kg | 320kg | 200kg |
| S.W.L On Extension | 113kg | 113kg | 113kg | 113kg | 113kg | 113kg |
| Max. Occupants | 2 | 2 | 2 | 2 | 2 | 2 |



| | | | | | | |
|-------------------------|-------|--------|--------|--------|--------|--------|
| A Working Height | 8.00m | 10.00m | 10.00m | 12.00m | 13.80m | 15.70m |
| B Platform Floor Height | 6.00m | 8.00m | 8.00m | 10.00m | 11.80m | 13.70m |



| | | | | | | |
|--------------------------------|-------------|-------------|-------------|-------------|-------------|-------------|
| C Overall Length | 2.48m | 2.48m | 2.48m | 2.48m | 2.48m | 2.84m |
| D Overall Width | 0.81m | 0.81m | 1.15m | 1.15m | 1.15m | 1.25m |
| Overall Height (Rails Up) | 2.20m | 2.32m | 2.32m | 2.44m | 2.58m | 2.58m |
| E Overall Height (Rails Down) | 1.87m | 1.89m | 1.78m | 1.92m | 2.04m | 2.26m |
| Platform Size (Length/Width F) | 2.27mX0.81m | 2.27mX0.81m | 2.27mX1.12m | 2.27mX1.12m | 2.27mX1.12m | 2.64mX0.81m |
| G Platform Extension Size | 0.90m | 0.90m | 0.90m | 0.90m | 0.90m | 0.90m |
| Ground Clearance (Stowed) | 0.10m | 0.10m | 0.10m | 0.10m | 0.10m | 0.10m |
| Ground Clearance (Raised) | 0.019m | 0.019m | 0.019m | 0.019m | 0.019m | 0.019m |
| Wheelbase | 1.87m | 1.87m | 1.87m | 1.87m | 1.87m | 2.22m |
| Turning Radius (Inside) | 0m | 0m | 0m | 0m | 0m | 0m |
| Turning Radius (Outside) | 2.10m | 2.10m | 2.20m | 2.20m | 2.20m | 2.65m |



| | | | | | | |
|---------------|-----------|-----------|-----------|-----------|-----------|-----------|
| Drive Motors | 24V/1.5kw | 24V/1.5kw | 24V/1.5kw | 24V/1.5kw | 24V/1.5kw | 24V/1.5kw |
| Lifting Motor | 24V/3.3kw | 24V/3.3kw | 24V/3.3kw | 24V/4.5kw | 24V/4.5kw | 24V/4.5kw |



| | | | | | | |
|-----------------------|----------|----------|----------|----------|----------|----------|
| Travel Speed (Stowed) | 4.0km/h | 4.0km/h | 4.0km/h | 4.0km/h | 4.0km/h | 4.0km/h |
| Travel Speed (Raised) | 0.8km/h | 0.8km/h | 0.8km/h | 0.8km/h | 0.8km/h | 0.8km/h |
| Up/Down Speed | 31/67sec | 42/30sec | 36/33sec | 54/42sec | 84/38sec | 88/60sec |



| | | | | | | |
|--------------------|------------|------------|------------|------------|-------------|-------------|
| Batteries | 4X6V/225Ah | 4X6V/225Ah | 4X6V/225Ah | 4X6V/240Ah | 4X12V/300Ah | 4X12V/300Ah |
| Integrated Charger | 24V/25A | 24V/25A | 24V/25A | 24V/25A | 24V/25A | 24V/25A |



| | | | | | | |
|-----------------------|-------|---------|-------|-------|---------|---------|
| Gradeability | 25% | 25% | 25% | 25% | 25% | 25% |
| Maximum Working Slope | 2°/3° | 1.5°/3° | 2°/3° | 2°/3° | 1.5°/3° | 1.5°/3° |



| | | | | | | |
|-------|------------|------------|------------|------------|------------|------------|
| Tyres | Φ381X127mm | Φ381X127mm | Φ381X127mm | Φ381X127mm | Φ381X127mm | Φ381X127mm |
|-------|------------|------------|------------|------------|------------|------------|





| | | | | | | |
|---------------|--------|--------|--------|--------|--------|--------|
| Weight (CE) | 2125kg | 2180kg | 2655kg | 2965kg | 2910kg | 3150kg |
| Weight (ANSI) | 2025kg | 2180kg | 2255kg | 2530kg | / | / |

Standard Equipment

- Proportional Controls
- Self-lock Gate On Platform
- Automatic Pothole Protection
- Drivable At Full Height
- Onboard Diagnostic System
- Non Marking Tyre
- Automatic Brake System
- Emergency Lowering System
- Emergency Stop Button
- Cylinder Holding Valve
- Extended Platform
- Horn
- Forklift Pockets
- Charger Protection
- All Motion Alarm
- 2WD
- Safety Brackets
- Hour Meter
- Flashing Beacon
- Tilt Sensor With Alarm
- Folding Guardrails

Options

- Overload Sensor With Alarm
- AC Power To Platform
- Platform Work Lights
- Airline To Platform

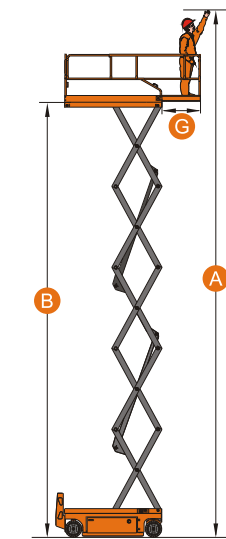

Folding Guardrails



Tight Turning Radius




Extended Platform



Gradeability



Swing Out Tray



Flashing Beacon



Emergency Lowering System



Foot Lock